
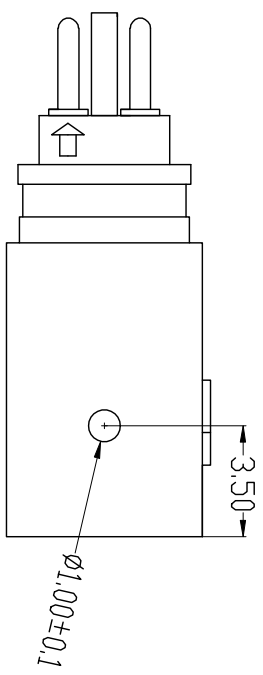
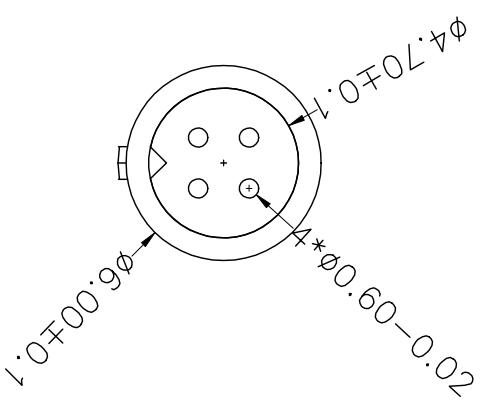
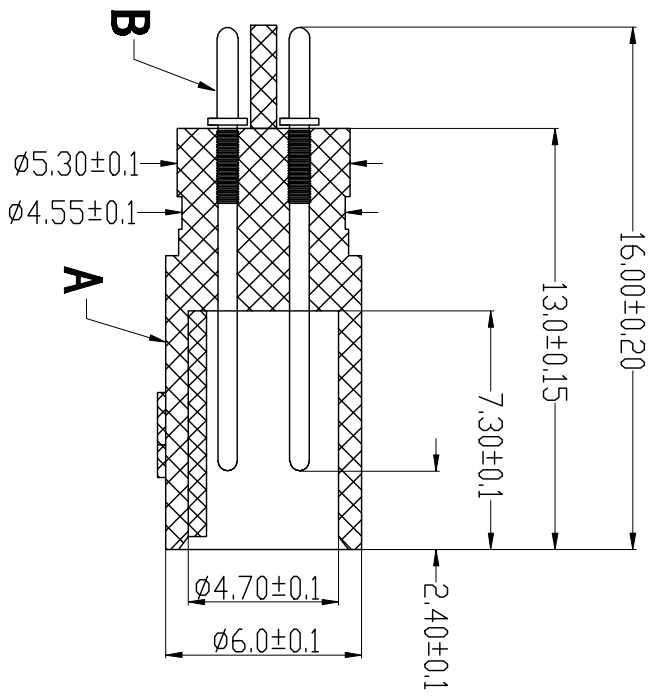


1 2 3 4 6 7 8

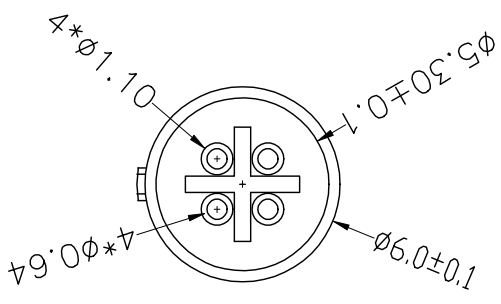

Engagement force	≤38N	Rated voltage	24V
Disengagement force	≥15N	Rated current	2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLACK	1
B CONTACT	BRASS	SILVER PLATED	4

TOLERANCE		TITLE:	
.xxx	±0.05	Dongguan Changjun Electronics Co., Ltd	
.xx	±0.10	东莞市昌骏电子有限公司	
.x	±0.20	PART NO: CJ-3M4-M01	
ANGLES	±1°	DRAWING NO.: CJ-3M4-M01	
		SHEET: 1 / 1	
		SCALE: 1 : 1	
		UNIT: mm	
		SIZE: REV	
		A/0	
		DRAWN: Xie Wenjun	
		CHECKS: Long Jichang	
		DATE: 2022-01-05	