
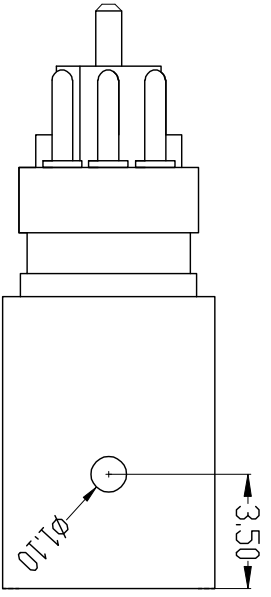


1 2 3 6 7 8

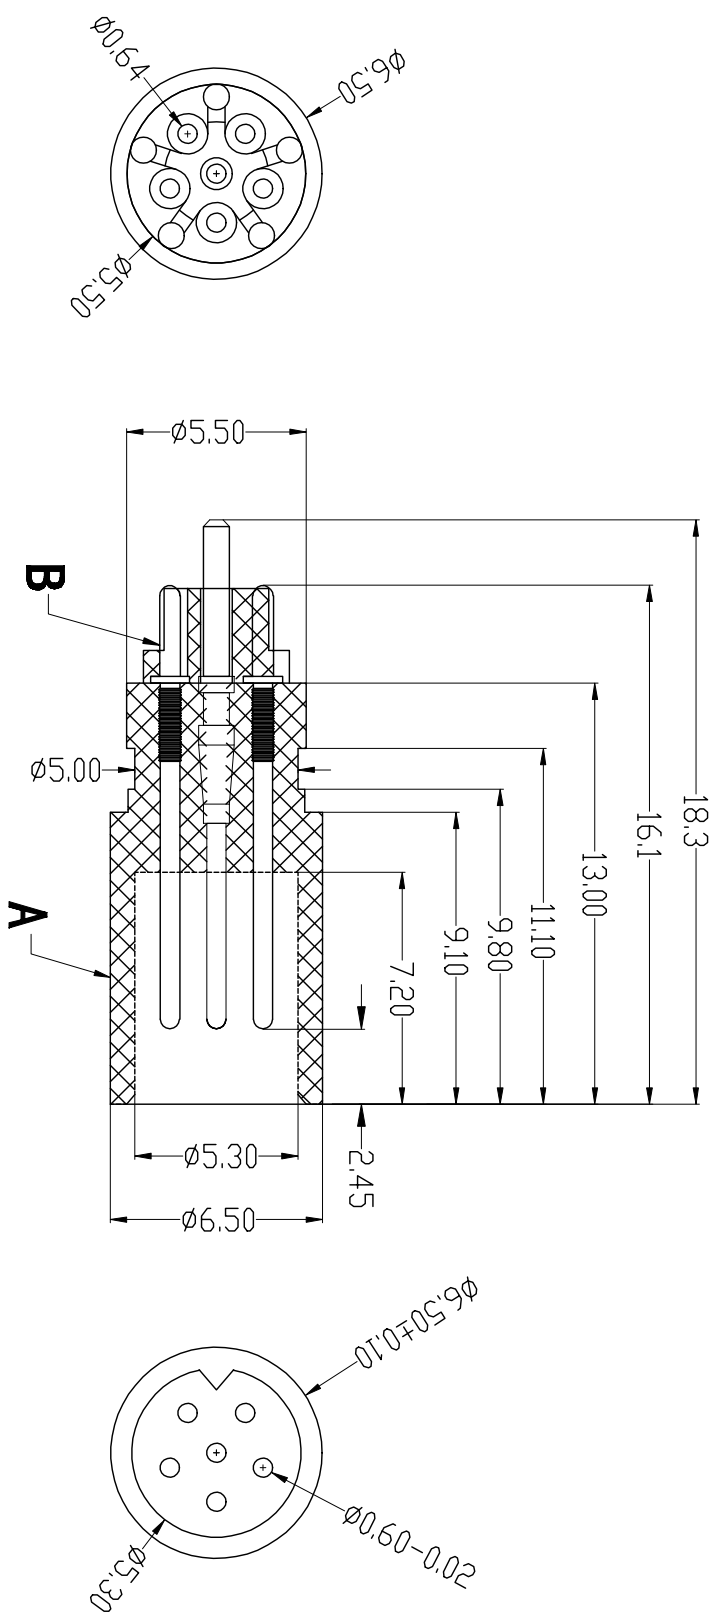

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	BLACK	1
B CONTACT	BRASS	SILVER PLATED	6

TOLERANCE .xxx ±0.05 .xx ±0.10 .x ±0.20 x ±0.50 ANGLE ±1°		TITLE: 宝马数据端子(详情)	
PART NO: CJ-BMG-M01		DRAWING NO.: GP-BMG012	
SHEET: 1 / 1		UNIT: mm	
SCALE: 1 : 1		SIZE: REV A/0	
DRAWN: Xie Wenjun		CHECKS: Long Jichang	
DATE: 2022-01-05			

Engagement force	≤50N	Rated voltage	24V
Disengagement force	≥25N	Rated current	2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating		Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作