

A

A

B


B

C

C

F

F

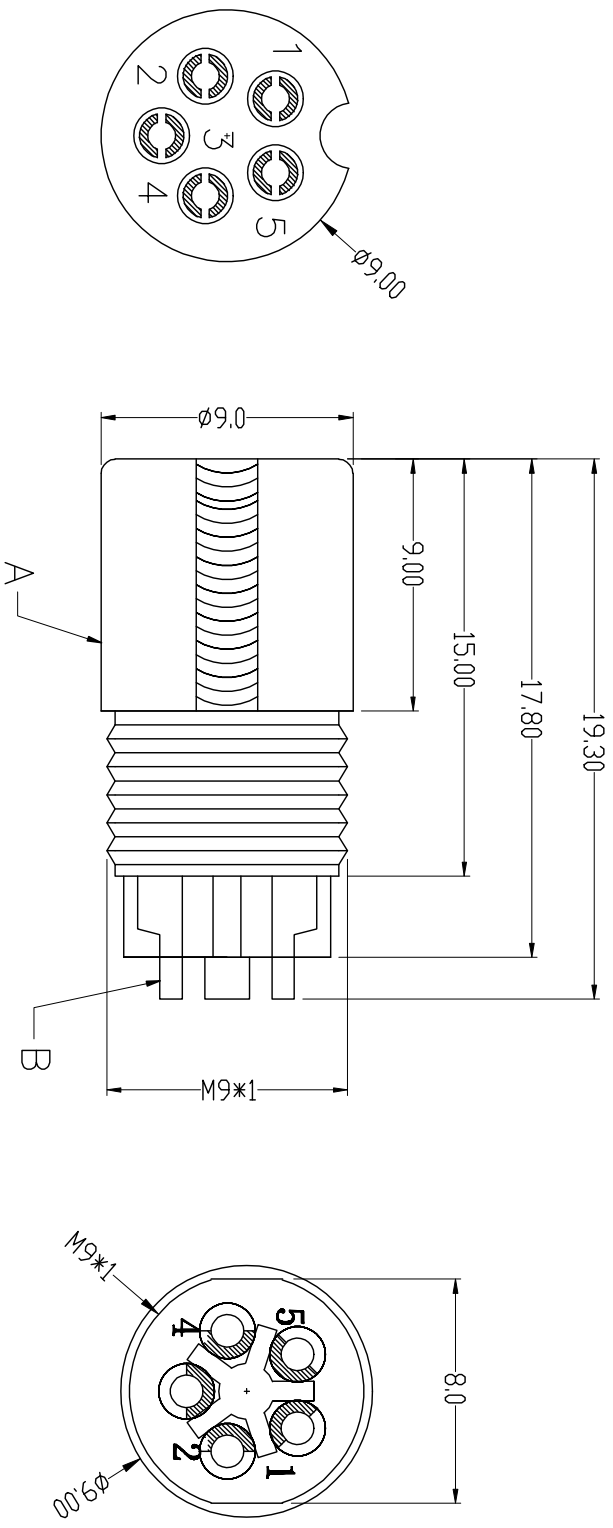

	1	2	3	4	5	6	7	8
Engagement force	≤50N	Rated voltage	60V					
Disengagement force	≥10N	Rated current	6A					
Mechanical lifespan	≥500	Insulation resistance	≥1000M $\Omega$					
IP rating	IP65/IP67	Contact resistance	≤10m $\Omega$					
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C					

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PBT+GF	BLACK	1
B CONTACT	BRONZE	SILVER PLATED	5

东莞市昌骏电子有限公司

TOLERANCE	.xxx .xx .x x	±0.05 ±0.10 ±0.20 ±0.50
ANGLE	± 1°	
TITLE:	GX12航空插座端子总成	
PART NO:	02-00000-001	DRAWING NO.: GP-GX120015
SHEET:	1 / 1	SCALE: 1 : 1
DRAWN:	Xie Wenjun	CHECKS: Long Jibang
DATE:		2022-01-05