
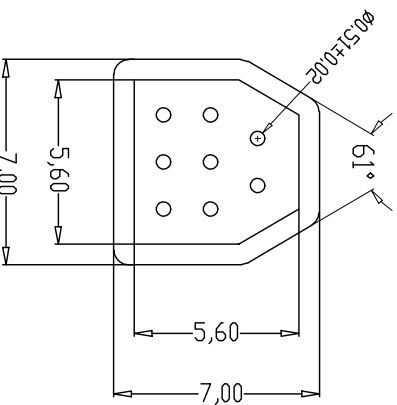
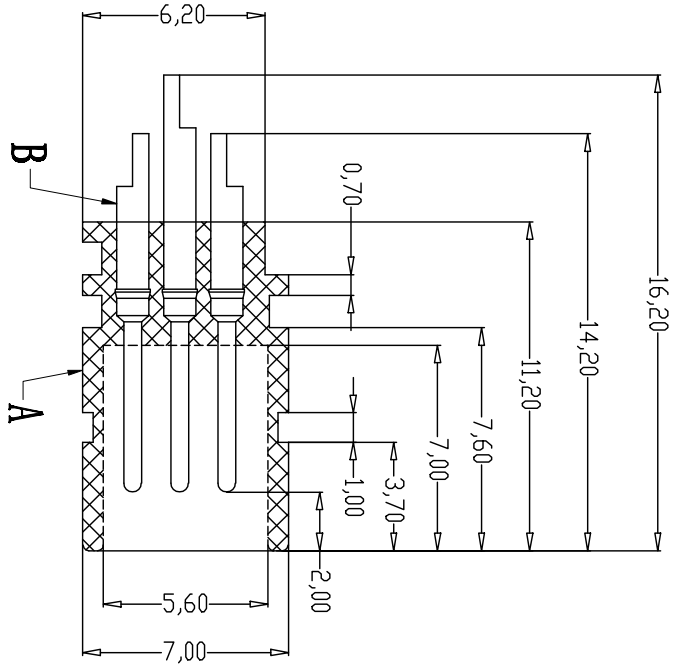



1 2 3 4 6 7 8

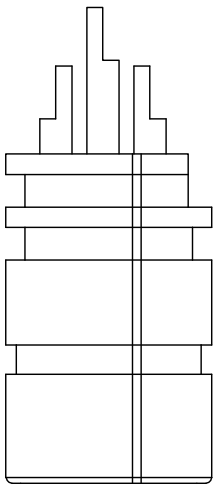

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PBT+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	8

Engagement force $\leq 20N$		Rated voltage 30V	
Disengagement force $\geq 5N$		Rated current 1.5A	
Mechanical lifespan ≥ 500		Insulation resistance $\geq 1000M\ \Omega$	
IP rating IP65/IP67		Contact resistance $\leq 10m\ \Omega$	
Flammability UL94 V-0		Operation Temperature $-40^{\circ}C \sim 105^{\circ}C$	

Dongguan Changjun ElectronicsCo., LTD
 东莞市昌骏电子有限公司

TITLE: 方型 mini插板连接器公头

TOLERANCE .xxx ±0.05 .xx ±0.10 .x ±0.20 x ±0.50 ANGLE ± 1°		PART NO.: CJ-FRM18-M01 SHEET: 1 / 1 SCALE: 1 : 1		DRAWING NO.: GP-FRM10001 UNIT: mm SIZE: REV A/0	
DRAWN: Xie Wenjun CHECKS: Long Jichang DATE: 2022-01-05					

1 2 3 4 6 7 8