

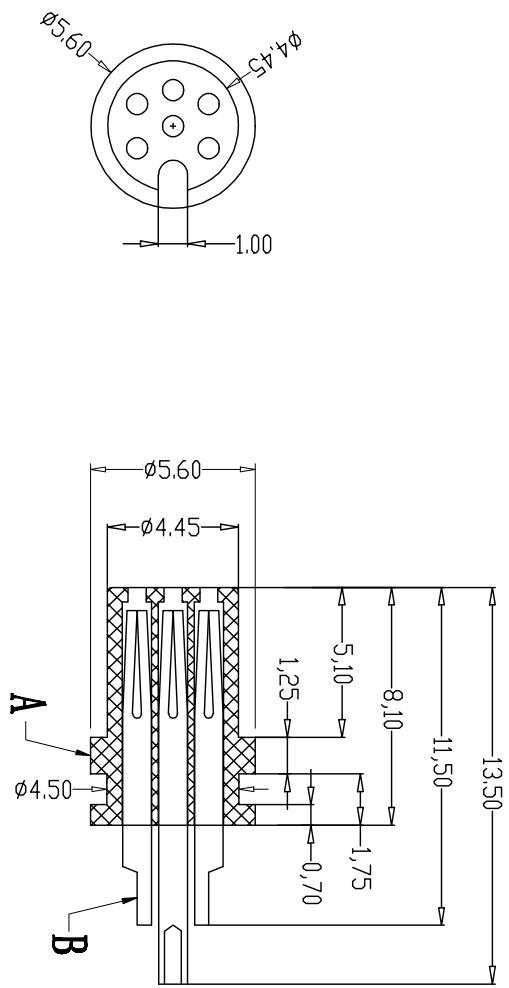


A	1	2	3	4	
B	2pin RED	3pin YELLOW	4pin BLUE	5pin GREEN	6pin BLACK

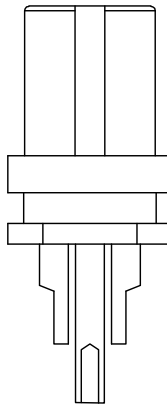

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PBT+GF	SPECIFY COLOR	1
B CONTACT	BRONZE	GOLD PLATED	2*6

Dongguan Changjun ElectronicsCo., LTD 东莞市昌骏电子有限公司		标题: 标准 mini 防水 2*6 针接插头	
TOLERANCE .xxx ±0.05 .xx ±0.10 .x ±0.20 x ±0.50 ANGLES ± 1°		PART NO.: CJ-MINI(2*6)-P01	
DRAWN: Xie Wenjun		CHECKS: Long Jichang	
DATE: 2022-01-05		DRAFTING NO.: CJ-MINI0003	
SHEET: 1 / 1		SCALE: 1 : 1	
UNIT: mm		SIZE: REV A/0	

Engagement force	≤20N	Rated voltage	30V
Disengagement force	≥5N	Rated current	1.5A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP65/IP67	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C