由 Autodesk 教育版产品制作

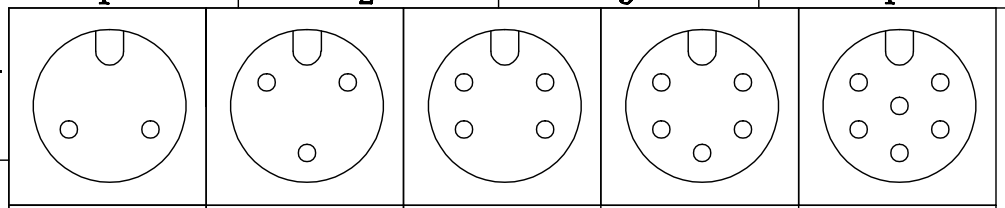

2pin	3pin	4pin	5pin	6pin
RED	YELLOW	BLUE	GREEN	BLACK

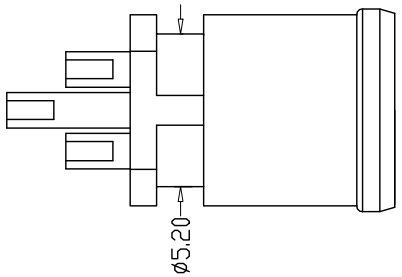

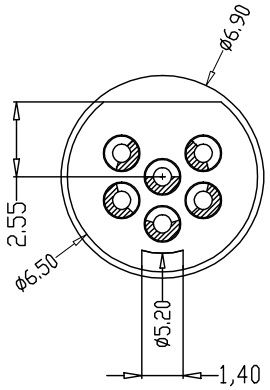

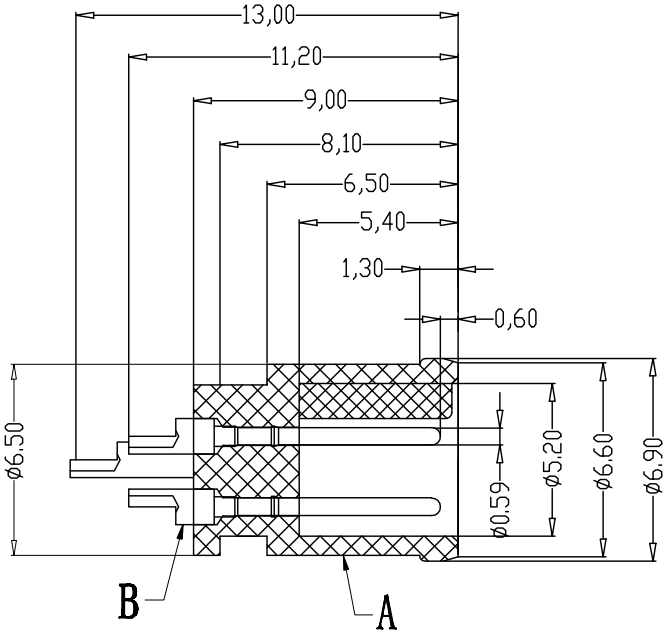

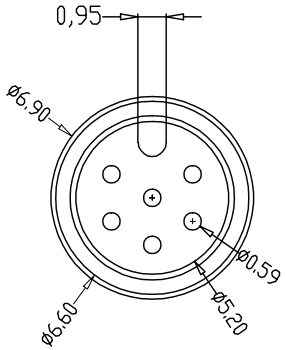

Engagement force	≤20N	Rated volage	30V
Disengagement force	≥5N	Rated current	2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP65/IP67	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PBT+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~6
C				
D				
E				
F				

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M7型 mini防水2~6P线端公头(削杯口)

PART NO: CJ-M7MI(2~6)-M02

DRAWING NO.: CP-M7MI0002

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-01-05

由 Autodesk 教育版产品制作