

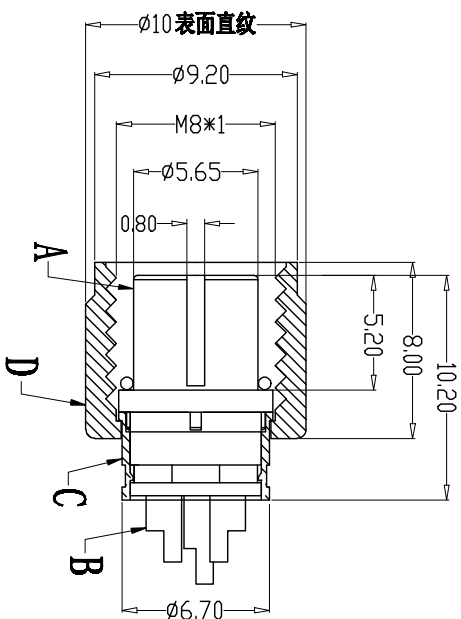




A	图形						
	编码	A-CODE	A-CODE	A-CODE	B-CODE	A-CODE	A-CODE



G	Engagement force	≤30N	Rated voltage	2-5pin:60V DC 6-9pin:30V DC
	Disengagement force	≥5N	Rated current	2-5pin:4A 6-9pin:2A
H	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
	IP rating	IP67/IP68	Contact resistance	≤10mΩ
F	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRONZE		2*8
C SHIELD	BRASS	NICKEL PLATED	1
D NUT	BRASS	NICKEL PLATED	1
E O-RING	EPDM	BLACK	1

Dongguan Changjun Electronics Co., Ltd		TITLE: 8pin 6.7mm 直插母头	
东莞市昌骏电子有限公司		规格: 6.7mm 直插母头	
TOLERANCE	±0.05	PART NO:	CJ-180006
±0.10	±0.20	CJ-180006(2)-P11P8-AL	DRAWING NO.:
±0.30	±0.50	1 / 1	SCALE: 1:1
±1°		DRAWN: Xie Wenjun	CHECK: Long Jibang
		DATE: 2022-01-05	