

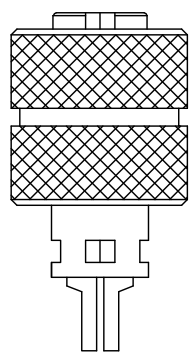

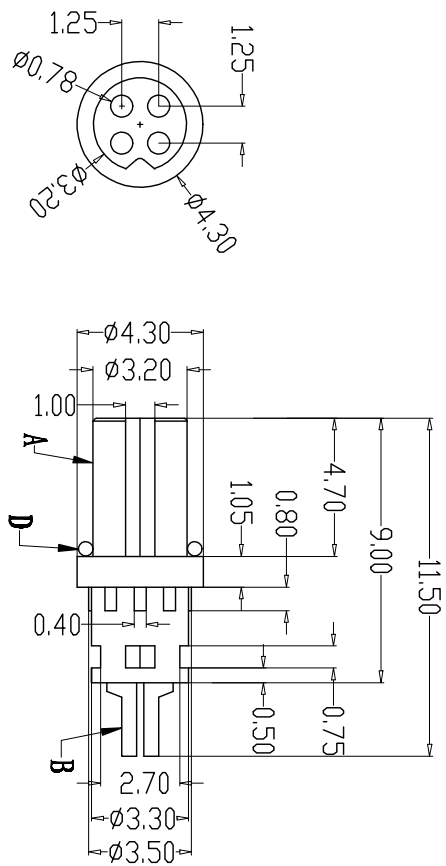


A	PIN数	1	2	3	4
	图 形				

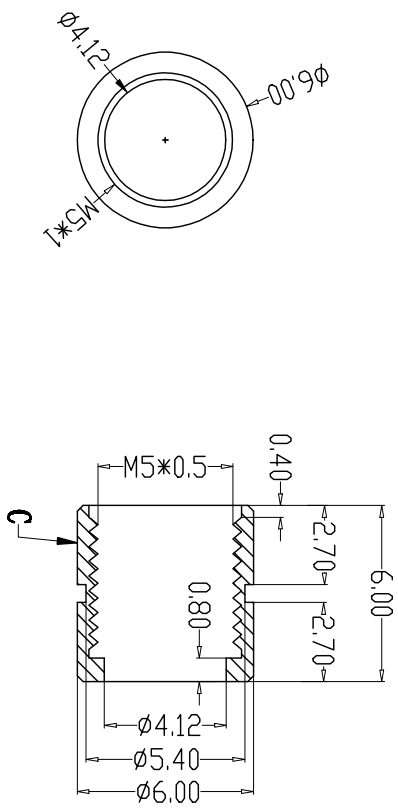

G	Engagement force	≤30N	Rated voltage	60V
	Disengagement force	≥5N	Rated current	1A
	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
	IP rating	IP67/IP68	Contact resistance	≤10m Ω
H	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRONZE	NICKEL PLATED	2*4
C NUT	BRASS	NICKEL PLATED	1
D O-RING	EPPDM	BLACK	1

Dongguan Changjun Electronics Co., Ltd 东莞市昌骏电子有限公司		TITLE: 防水2*4线缆插头+网纹螺母 PART NO.: GJ-WAIA02*4-001 DRAWING NO.: GJ-W50006	
TOLERANCE .xxx .xx .x x ANGLE ±1°	DRAWN: Xie Wenjun CHECK: Long Jibang DATE: 2022-01-05	SHEET: 1 / 1 SCALE: 1 : 1 UNIT: mm SIZE: A4 REV: A/0	DRAFTING NO.: GJ-W50006