


图形	规格	数量	项目	寿命力	插接力	耐电压	绝缘阻抗	接触阻抗	额定电流	额定电压
	M1.0	1.00	防水插头	3000次以上	1.0-3.8KG	500V AC	$\geq 1000M\Omega$	$\leq 20m\Omega$	2-40mA 2.5Vdc 6-90min:2h	2-40mA 2.5Vdc 6-90min:2h
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								
	M1.0	1.00								

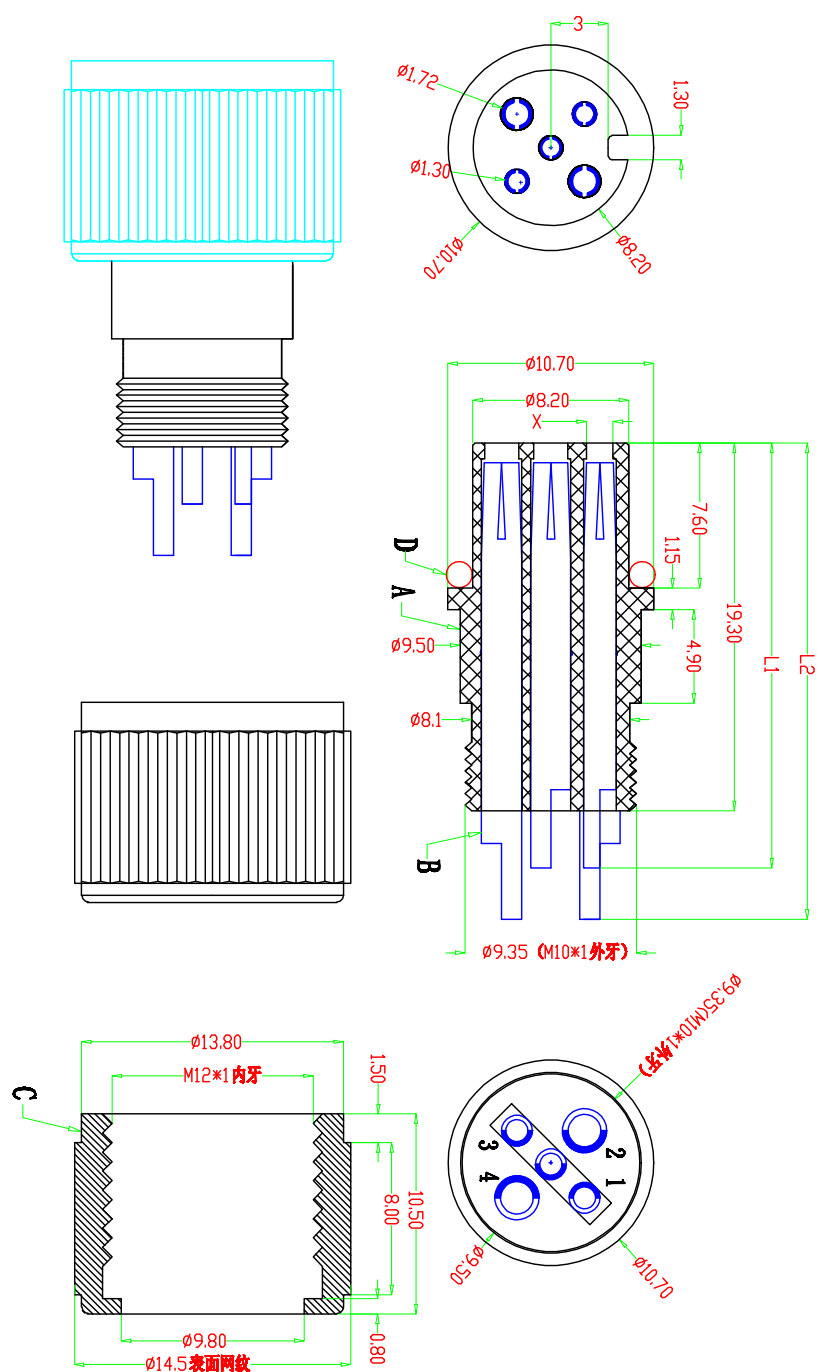

项目	零件名称	零件材质	处 理	数 量
A	绝缘体	PA66/胶料	注塑黑色	1
B	PIN 针	磷 铜	镀 金	2-8
C	五金螺母	黄 铜	镀 镍	1
D	防水圈	硅 胶	红色/黑色	1

适用环境温度:  $-40 \sim 105^\circ$   
 防水等级: IP67

由 Autodesk 教育版产品制作

东莞市昌骏电子有限公司

TITLE: M12防水2P-8P线端母座A-CODE:10 孔直纹螺母

PART NO: GJ-M12防水(2-8P)-A-P03

DRAWING NO.: CP-142

SHEET: 1 / 1

SCALE: 4 : 1

UNIT: mm

SIZE: A4

REV: A/0

APPD: 谢海军

CHECK: 龙吉昌

DRAWN: 2018-03-10