

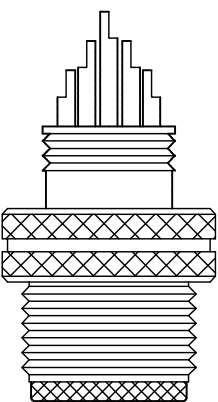
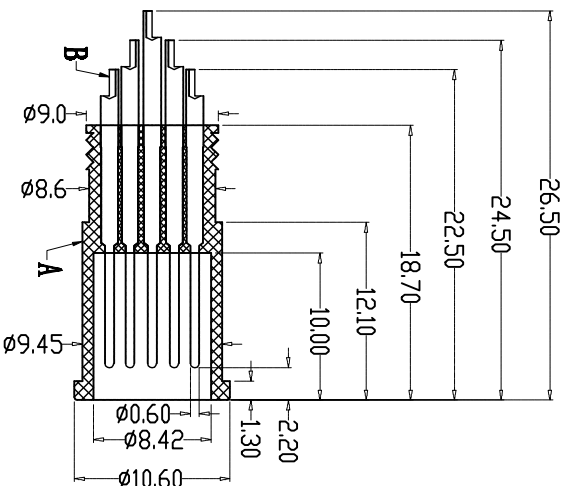



	1	2	3	4	5	6	7	8	
A	9pin	10pin	11pin	12pin	13pin	14pin	15pin	16pin	17pin
B									

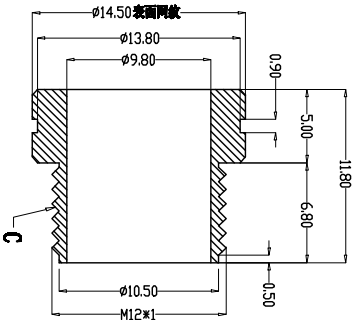

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	9~17
C NUT	ZINC ALLOY	NICKEL PLATED	1

Engagement force	≤50N	Rated voltage	30V
Disengagement force	≥10N	Rated current	1.5A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contact resistance	≤10mΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司

TITLE: H12防水9~17针连接器外壳+11.8mm间距插孔

PART NO: GJ-H120073

SCALE: 1:1

SIZE: A4

DATE: 2022-01-05