
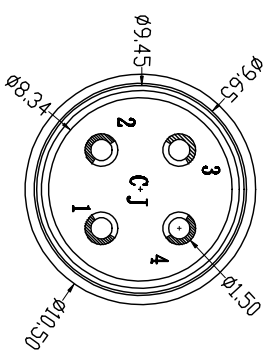
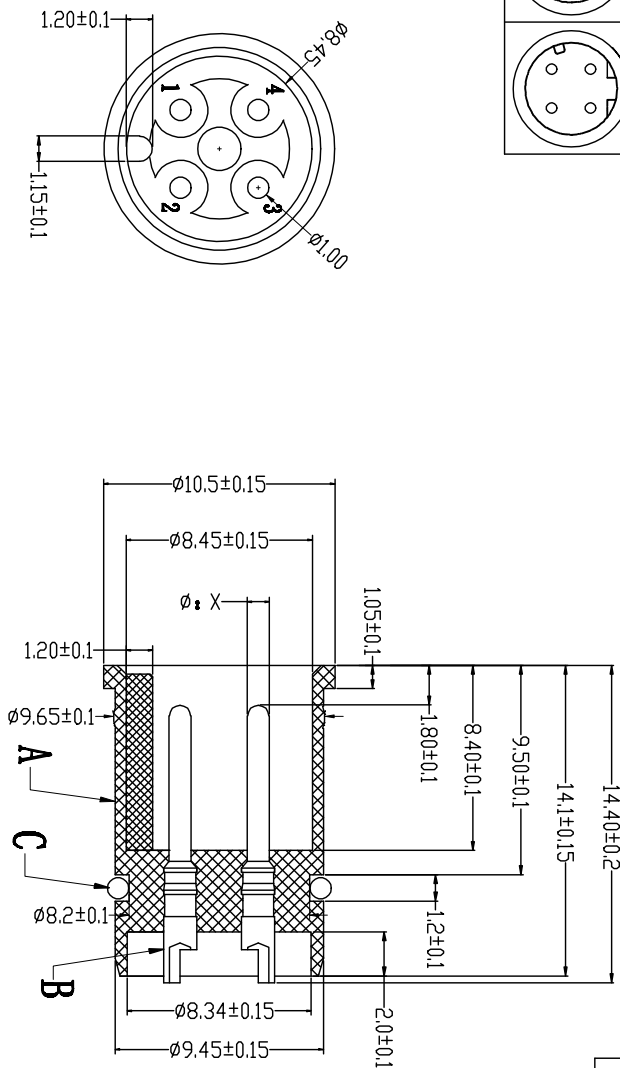


A	pin位	1	2	3	4	5	6	7	8
	X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	0.80
A-000E	图形								
	B-000E								
	D-000E								



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	2*8
C O-RING	EPDM	BLACK	1
D			
E			
F			

Engagement force $\leq 50N$		Rated voltage $\geq 5N$	
Disengagement force ≥ 500		Rated current $\geq 1000mA$	
Mechanical lifespan ≥ 500		Insulation resistance $\geq 1000M\Omega$	
IP rating IP67/IP68		Contact resistance $\leq 10m\Omega$	
Flammability UL94 V-0		Operation Temperature $-40^{\circ}C \sim 105^{\circ}C$	

Dongguan Changjun Electronics Co., LTD
 东莞市昌骏电子有限公司

TOLERANCE .xxx ±0.05 .xx ±0.10 .x ±0.20 ±1.0 ANGLE ±1°		TITLE: H1208 水口 8 芯 连接器 公头 14.4L	
PART NO: CP-H120803 8-201-14.4L		DRAWING NO.: CP-H120002	
SHEET: 1 / 1		SCALE: 1 : 1	
DRAWN: Xie Wenjun		CHECKS: Long Jichang	
DATE: 2022-01-05		REV: A/0	