
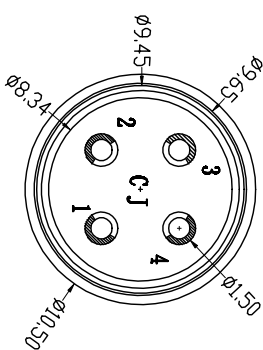
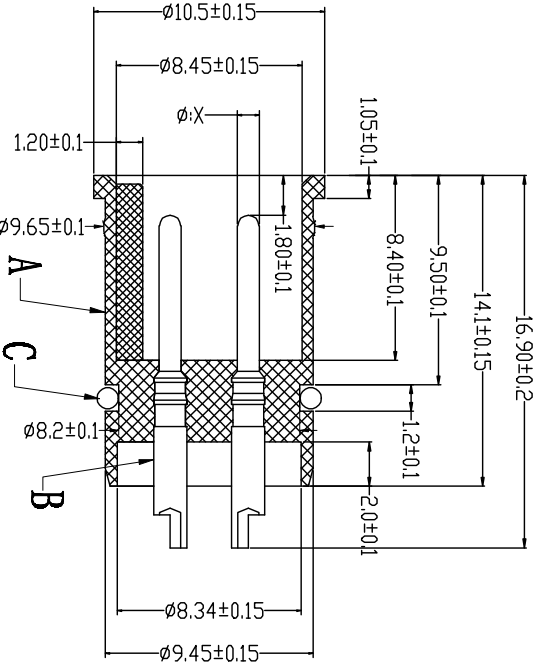



A	1		2		3		4	
	pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-D型 圆形								
B-D型 圆形								
C D-型 圆形								

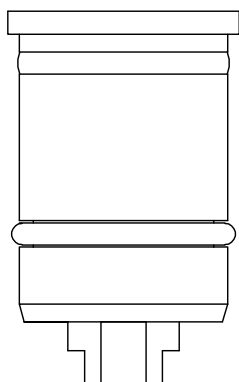

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

G	1		2		3		4	
	Engagement force	≤50N	Rated voltage	≤50V	Rated current	≤10A	Insulation resistance	≥1000MΩ
	Disengagement force	≥5N	Rated current	≤10A	Insulation resistance	≥1000MΩ	Contact resistance	≤10mΩ
	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	Contact resistance	≤10mΩ	Operation Temperature	-40° C~105° C
H	IP rating	IP67/IP68	Contact resistance	≤10mΩ	Operation Temperature	-40° C~105° C		
	Flammability	UL94 V-0						

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRASS	BLACK	2*8
C O-RING	EPDM		1

由 Autodesk 教育版产品制作

Dongguan Changjun Electronics Co., Ltd  
东莞市昌骏电子有限公司

TOLERANCE	±0.05	TITLE:	连接器
XXX	±0.10	PART NO.:	连接器
XX	±0.20	CF NUMBER:	连接器
X	±0.50	SCALE:	1:1
ANGLE	±1°	SIZE:	AA
		REV:	A/0
		DATE:	2022-01-05