
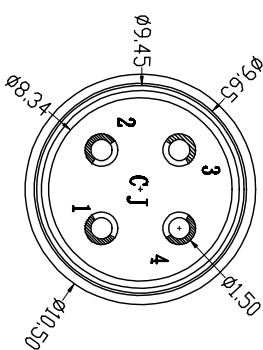
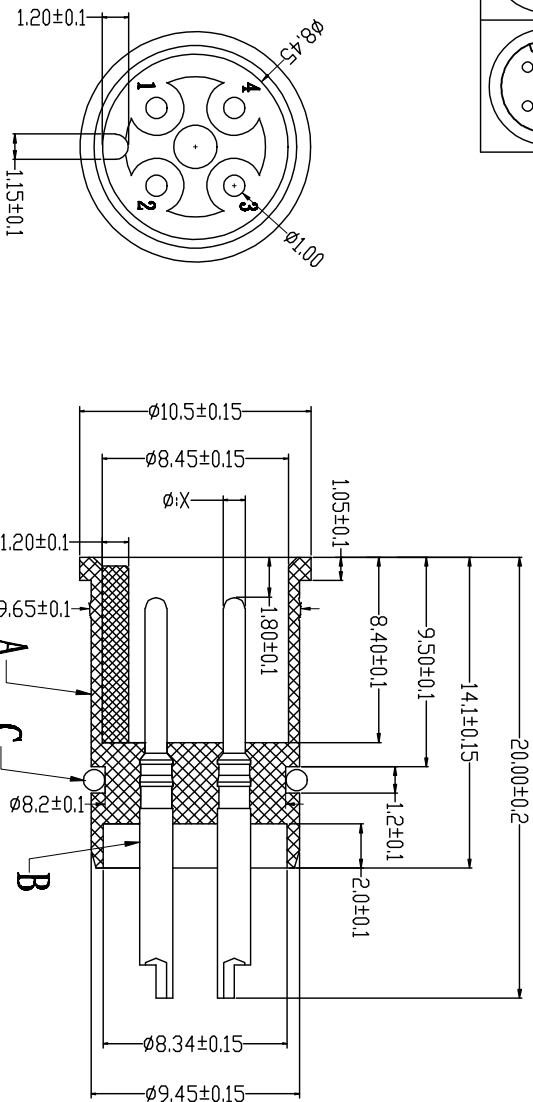


A	1			2			3		
	pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-000E 图形									
B-000E 图形									
D-000E 图形									

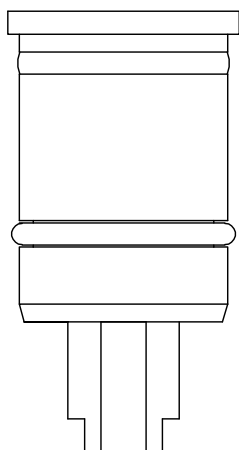

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

G		H	
Engagement force	Rated voltage	Rated current	Rated voltage
Engagement force	Rated voltage	Rated current	Rated voltage
Disengagement force	Rated current	Rated voltage	Rated current
Mechanical lifespan	Insulation resistance	Contact resistance	Insulation resistance
IP rating	Contact resistance	Operation Temperature	Contact resistance
Flammability	Operation Temperature		Operation Temperature

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	2*8
C O-RING	EPDM	BLACK	1
D			
E			
F			

Dongguan Changjun Electronics Co., LTD  
东莞市昌骏电子有限公司

TOLERANCE		TITLE:	
.xxx	±0.05	H100000000-001-001	
.xx	±0.10	DRAWING NO.:	
.x	±0.20	PART NO.:	
x	±0.50	CF-H1000000-001-001	
ANGLE	± 1°	SCALE:	
		1 : 1	
		UNITS: mm	
		SIZE: A4	
		REV: A/0	
		DATE: 2022-01-05	
		DRAWN: Xie Wenjun	
		CHECKS: Long Jichang	