

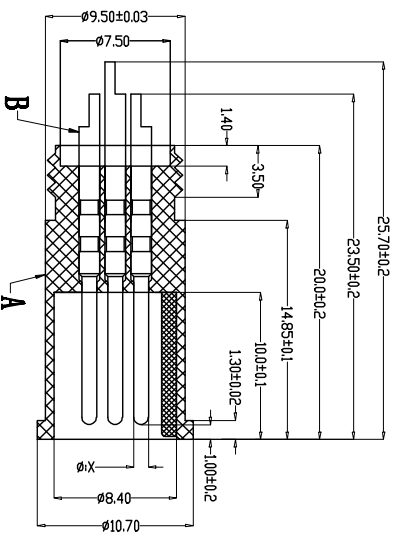
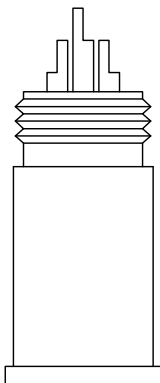





		1		2		3	
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
A X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-000E 圆形							
B D-000E 圆形							
C D-000E 圆形							

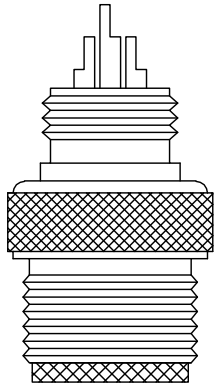

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

		1		2		3	
Engagement force	≤50N	Rated voltage	Rated current	Insulation resistance	Contact resistance	Operation Temperature	
Disengagement force	≥5N	Rated current	Rated current	Insulation resistance	Contact resistance	Operation Temperature	
Mechanical lifespan	≥500	Insulation resistance	Rated current	Insulation resistance	Contact resistance	Operation Temperature	
IP rating	IP67/IP68	Contact resistance	Rated current	Insulation resistance	Contact resistance	Operation Temperature	
Flammability	UL94 V-0	Operation Temperature	Rated current	Insulation resistance	Contact resistance	Operation Temperature	

PARTS		MATERIALS		TREATMENT		AMOUNT	
A	HOUSING	PA66+GF		GOLD PLATED		1	
B	CONTACT	BRASS		NICKEL PLATED		2*8	
C	NUT	BRASS				1	

Dongguan Changjun Electronics Co., LTD  
东莞市昌骏电子有限公司

TOLERANCE		TITLE:	
.xxx	±0.05	M12防水D型接触公头球*12 4层镀镍丝	
.xx	±0.10	PART NO:	
.x	±0.20	DRAWING NO.:	
ANGLE	±1°	SHEET: 1/1	
		SCALE: 1:1	
		UNIT: mm	
		SIZE: A4	
		REV: A/0	
		DATE: 2022-01-05	