

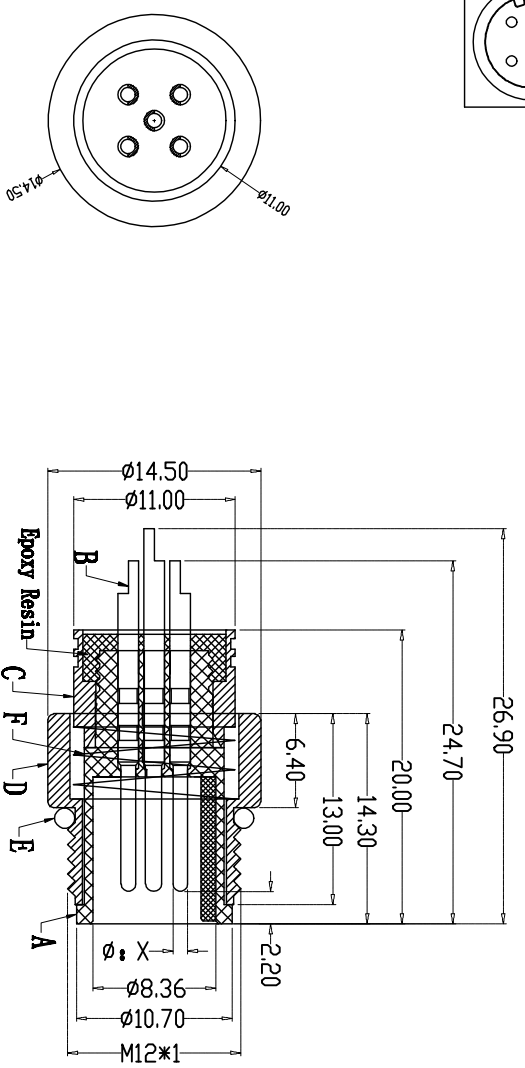


		1			2			3		
A	X 值	2pin	3pin	4pin	5pin	6pin	7pin	8pin		
A-one	1.00									
B										
C										

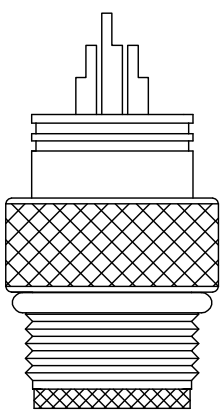

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

		1			2			3			6			7			8									
H		IP rating	Flammability	Engagement force	Disengagement force	Mechanical lifespan	Rated voltage	Rated current	Insulation resistance	Contact resistance	Operation Temperature	PARTS	MATERIALS	TREATMENT	AMOUNT	TOLERANCE	TITLE:	PART NO.:	DRAWING NO.:	SHRIBT:	SCALE:	UNIT:	SIZE:	REV	DATE:	
		IP67/IP68	UL94 V-0	≤50N	≥5N	≥500	≤500V	≤500mA	≥1000MΩ	≤10mΩ	-40° C~105° C	A HOUSING	PA66+GF	GOLD PLATED	1	±0.05	Dongguan Changjun Electronics Co., LTD 东莞市昌骏电子有限公司									
												B CONTACT	BRASS		2*8	±0.10	H12防水型连接器公头插针+弹片铜线									
												C SHIELD	BRASS	NICKEL PLATED	1	±0.05	DR-1120060									
												D NUT	BRASS	NICKEL PLATED	1	±0.05	GF-H120060									
												E O-RING	EPDM	BLACK	1	±1°	1 / 1									
												F SPRING	SS	BLACK	1		DRAWN: Xie Wenjun									
																	CHECK: Long Jichang									
																	DATE: 2022-01-05									