
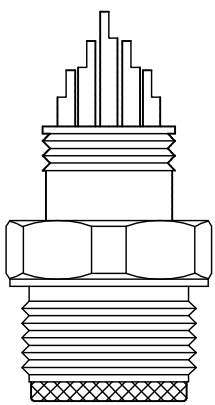
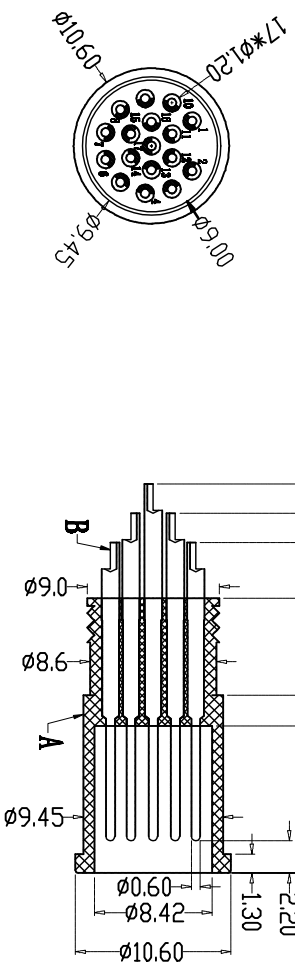


	1	2	3	4	5	6	7	8
A	9pin	10pin	11pin	12pin	13pin	14pin	16pin	17pin
B								

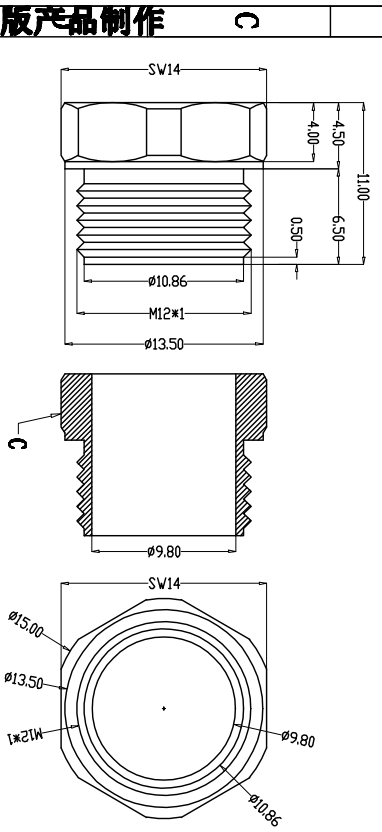

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

G	Engagement force		$\leq 50N$	Rated voltage	30V
	Disengagement force		$\geq 10N$	Rated current	1.5A
	Mechanical lifespan		$\geq 500$	Insulation resistance	$\geq 1000M \Omega$
H	IP rating		IP67/IP68	Contact resistance	$\leq 10m \Omega$
	Flammability		UL94 V-0	Operation Temperature	$-40^{\circ}C \sim 105^{\circ}C$

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PAGE68F	GOLD PLATED	1
B CONTACT	BRASS	NICKEL PLATED	9*17
C NUT	BRASS		
D			
E			
F			

Dongguan Changjun Electronics Co., LTD		TITLE:	
东莞市昌骏电子有限公司		H12防水9~17针连接器公头(带+11L六角螺柱)	
TOLERANCE		PART NO.:	
.xxx ±0.05		CJ-H120077	
.xx ±0.10		DRAWING NO.:	
.x ±0.20		CJ-H120077	
ANGLES ± 1°		UNITS: mm	
DRAWN: Xie Kunjun		SCALE: 1:1	
CHECK: Long Jichang		SIZE: A4	
		DATE: 2022-01-05	