
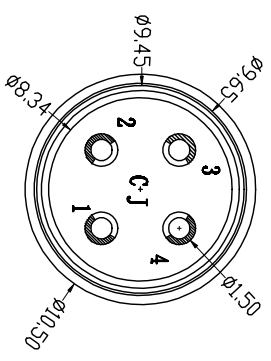
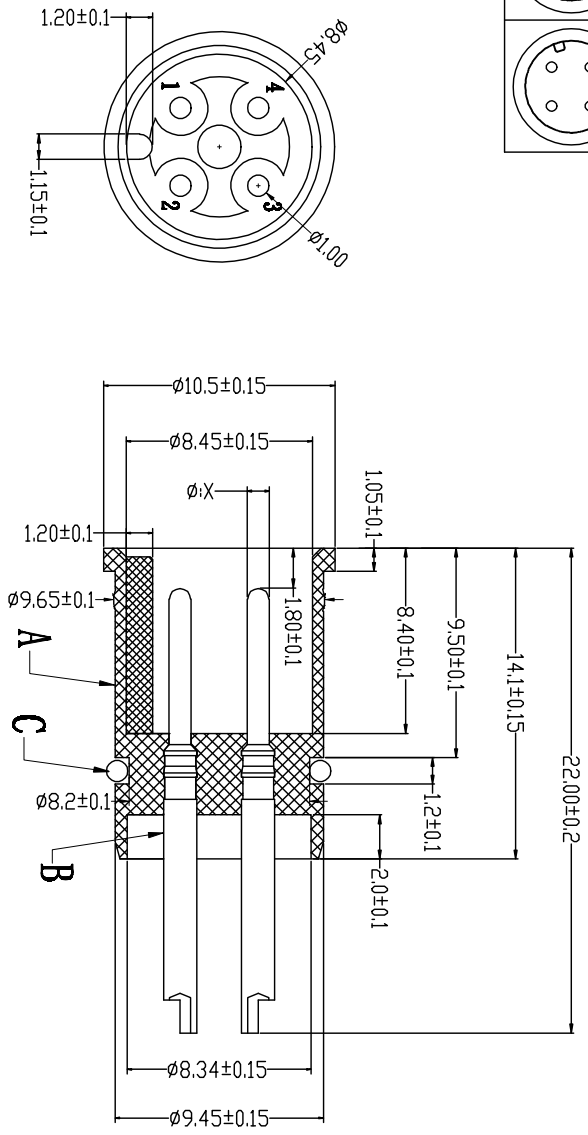


		1			2			3		
A	X 值	2pin	3pin	4pin	5pin	6pin	7pin	8pin		
1.00	1.00	1.00	1.00	1.00	1.00	0.80	0.80	0.80		

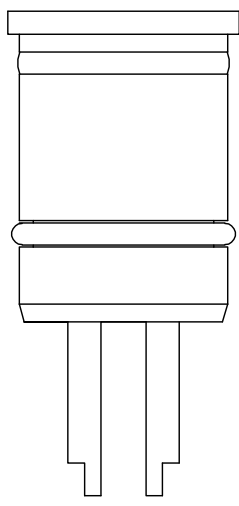

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

		1		2		3	
H		IP rating	IP67/IP68	Contact resistance	≤10mΩ	Operation Temperature	-40° C~105° C
Flammability		UL94 V-0					
Mechanical lifespan		≥500		Insulation resistance	≥1000MΩ		
Disengagement force		≥5N		Rated current	2.5A/3A		
Engagement force		≤50N		Rated voltage	250V/300V		

		6		7		8	
A	HOUSING	PAGE6+G	SPECIFY COLOR	AMOUNT	1	2*8	
B	CONTACT	BRASS	GOLD PLATED				
C	O-RING	EPDM	BLACK				
D							
E							
F							

Dongguan Changjun Electronics Co., LTD
东莞市昌骏电子有限公司

TITLE:	H180水2*8连接器公共插芯22L		
PART NO.:	CF-H120005		
CF-H120005	SCALE:	1:1	SIZE: REV A/0
1/1	SCALE:	1:1	SIZE: REV A/0
DRAWN:	Xie Wenjun	CHECKS:	Long Jichang
DATE:			2022-01-05