

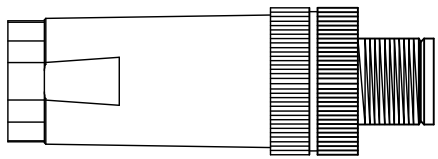

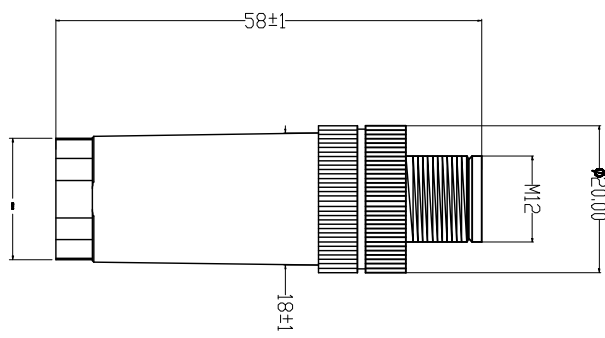


A	pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
	X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
B	A-D00E 图形							
	B-D00E 图形							
C	D-D00E 图形							

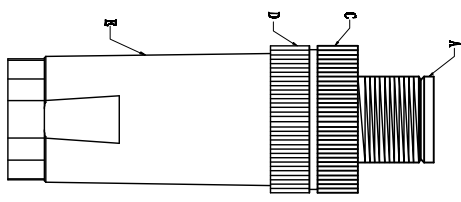

G	Engagement force	$\leq 50N$	Rated voltage	$\leq 50V$	PARTS	HOUSING	PA66+GF	TREATMENT	GOLD PLATED	AMOUNT	1
	Disengagement force	$\geq 5N$	Rated current	$\leq 5A$		CONTACT	BRASS			2*8	
H	Mechanical lifespan	≥ 500	Insulation resistance	$\geq 1000M\ \Omega$	NUT	BRASS	NICKEL PLATED	SPECIFY COLOR		1	
	IP rating	IP67/IP68	Contact resistance	$\leq 10m\ \Omega$	NUT	PA66+GF	SPECIFY COLOR		1		
H	Flammability	UL94 V-0	Operation Temperature	$-40^{\circ}C \sim 105^{\circ}C$	SHELL	PA66+GF	SPECIFY COLOR		1		

Dongguan Junhao Interconnection Technology Co., Ltd 东莞市俊豪互连科技有限公司			
TITLE: 网络接口连接器外壳 翻模式直头		PART NO: JH-120194	
TOLERANCE .xxx .xx .x ANGLES ± 1°	DRAWN: Xie Tengjun CHECK: Long Jichang DATE: 2022-07-01	SHEET: 1 / 1 SCALE: 1 : 1	DRAFTING NO.: UNIT: mm SIZE: A4 REV: A/0