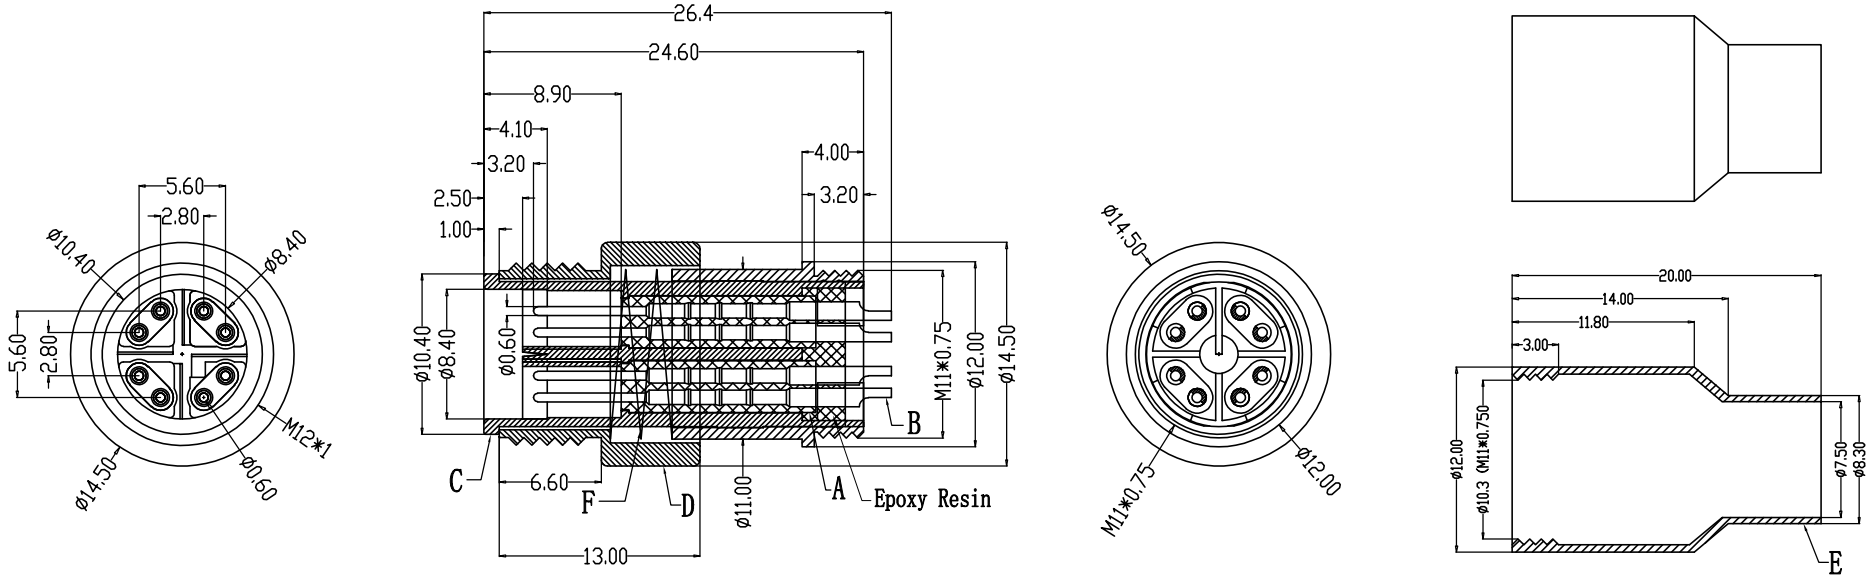


组合图

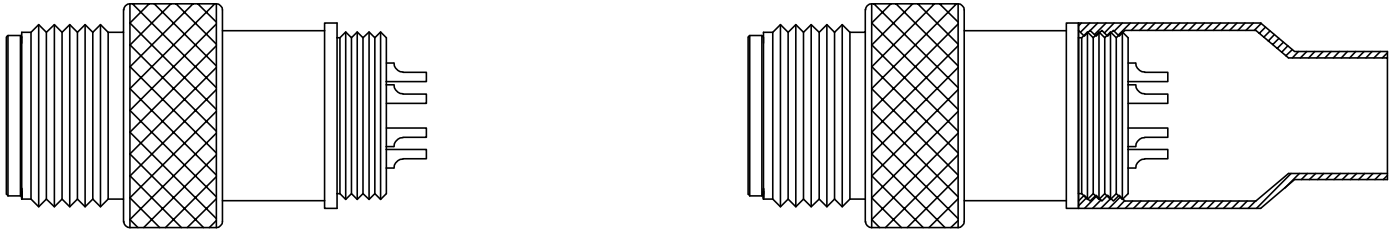

| | | | |
|---|---|---|---|
| Engagement force | ≤50N | Rated volage | 48V |
| Disengagement force | ≥10N | Rated current | 0.5A |
| Mechanical lifespan | ≥500 | Insulation resistance | ≥1000M Ω |
| IP rating | IP67/IP68 | Contact resistance | ≤10m Ω |
| Flammability | UL94 V-0 | Operation Temperature | -40° C~105° C |

| | PARTS | MATERIALS | TREATMENT | AMOUNT |
|---|---|---|---|---|
| A | HOUSING | PA66+GF | SPECIFY COLOR | 1 |
| B | CONTACT | BRASS | GOLD PLATED | 8 |
| C | OUTER CONTACT | ZINC ALLOY | NICKL PLATED | 1 |
| D | NUT | BRASS | NICKL PLATED | 1 |
| E | SHIELD | BRASS | NICKL PLATED | 1 |
| F | SPRING | SS | BLACK | 1 |

Dongguan Changjun ElectronicsCo.,LTD

东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M12防水8P线端公头X-CODE+锁牙屏蔽管

| PART NO: | DRAWING NO.: | | | |
|---|---|---|---|---|
| CJ-M12X8X-M02 | CP-M120150 | | | |
| SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV A/0 |
| DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-05-12 | | |