






A	2PIN	3PIN改3	4PIN	5PIN方形	6PIN	7PIN	8PIN
PIN位	2PIN	3PIN改3	4PIN	5PIN方形	6PIN	7PIN	8PIN
X值	φ1.00	φ1.00	φ1.00	φ1.00	φ0.80	φ0.80	φ0.80
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							

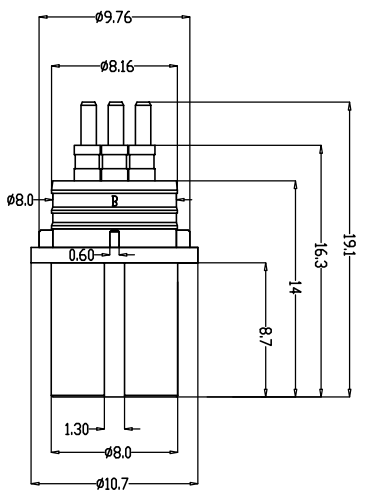

6~8PIN



2~5PIN



Engagement force	Disengagement force	Mechanical lifespan	IP rating	Flammability
≤50N	≥5N	≥500	IP67/IP68	UL94 V-0
Rated voltage	Rated current	Insulation resistance	Contact resistance	Operation Temperature
2.5pin:60V 6-pin:30V	2.5pin:4A 6-pin:2A	≥1000M Ω	≤10m Ω	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRONZE	GOLD PLATED	2~8
C			
D			
E			
F			

**东莞市昌骏电子有限公司**  
Dongguan Changjun Electronics Co., LTD

**MI20334 2~8芯插座头0款19\_1L**

TITLE:	TOLERANCE	DRAWING NO.:
MI20334	±0.05 ±0.10 ±0.30 ±0.50	CP-M120334
PART NO.:	ANGLE	DRAWING NO.:
CP-M120334	±1°	CP-M120334
SHEET:		UNIT:
1 / 1		mm
SCALE:		SIZE:
1 : 1		A4
DRAWN:	CHECK:	DATE:
Xie Wenjun	Long Jichang	2023-07-27