由 Autodesk 教育版产品制作



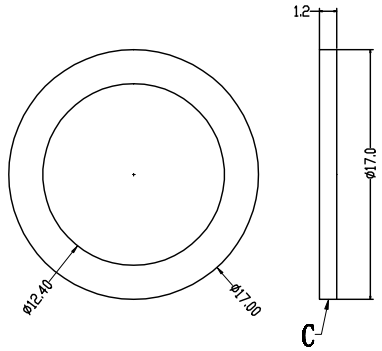

Recommended Panel Cut-out







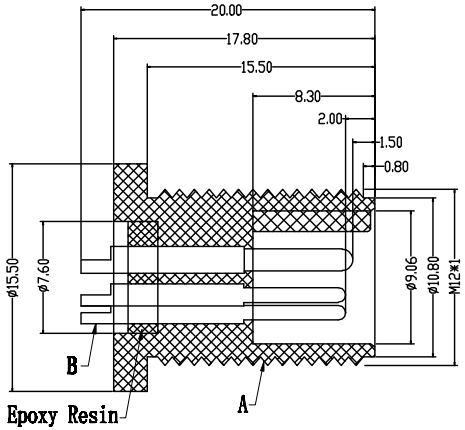



					PARTS	MATERIALS	TREATMENT	AMOUNT
				A	HOUSING	PA66+GF	BLACK	1
Engagement force	≤50N	Rated volage	60V	B	CONTACT	BRASS	GOLD PLATED	5
Disengagement force	≥5N	Rated current	7.5A	C	SHIM	SILICA GEL	BLACK	1
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	D	NUT	PA66+GF	BLACK	1
IP rating	IP67/IP68	Contact resistance	≤10m Ω	E				
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	F				

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ±_1°

TITLE: M12防水5P铁壳公头 前锁面板式T-AX款

PART NO: CJ-M12YXX5-M01Q-AX

DRAWING NO.: CP-M120126

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV: A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-01-05

由 Autodesk 教育版产品制作