





Recommended Panel Cut-out



A	1			2			3		
	pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-000E 图形									
B-000E 图形									
D-000E 图形									



6PIN~8PIN



2PIN~5PIN

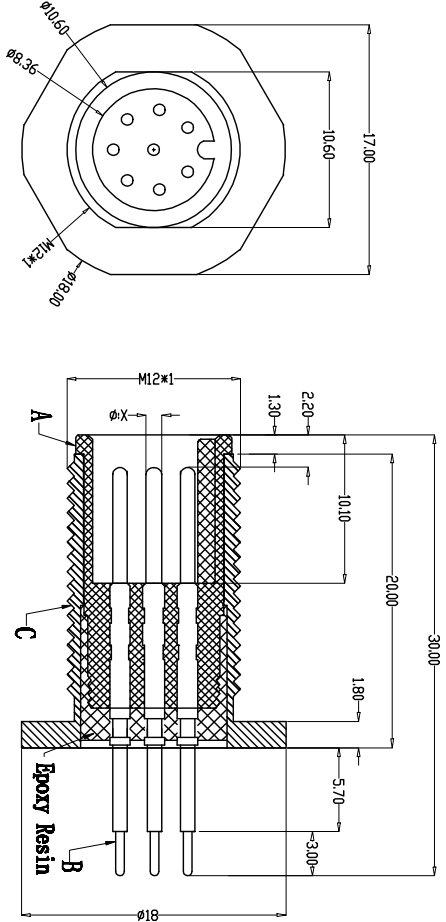

由 Autodesk 教育版产品制作

G	1		2		3		F	
	Engagement force	≤50N	Rated voltage	≤50V	Contact resistance	≤10 <sup>m</sup> Ω	Operation Temperature	-40° C~105° C
H	Disengagement force	≥5N	Rated current	≤500mA	Insulation resistance	≥1000MΩ	IP rating	IP67/IP68
	Mechanical lifespan	≥500	Flammability	UL94 V-0				

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	GOLD PLATED	1
B CONTACT	BRASS	NICKEL PLATED	2~8
C OUTER CONTACT	BRASS	NICKEL PLATED	1
D NUT	BRASS	BLACK	1
E O-RING	EPDM		1

Dongguan Changjun Electronics Co., LTD  
东莞市昌骏电子有限公司

TOLERANCE	TITLE:	SCALE:	UNIT:	SIZE:
±0.05	H120系列“双板”板头 背面板头H12 SM17T-30L	1:1	mm	REV A/0
±0.10	PART NO.:	1/1		
±0.20	DATE:			
±0.50	DRW: Xie Kunjun			
ANGLES	CHECK: Long Jichang			
	DATE: 2022-01-05			

由 Autodesk 教育版产品制作