
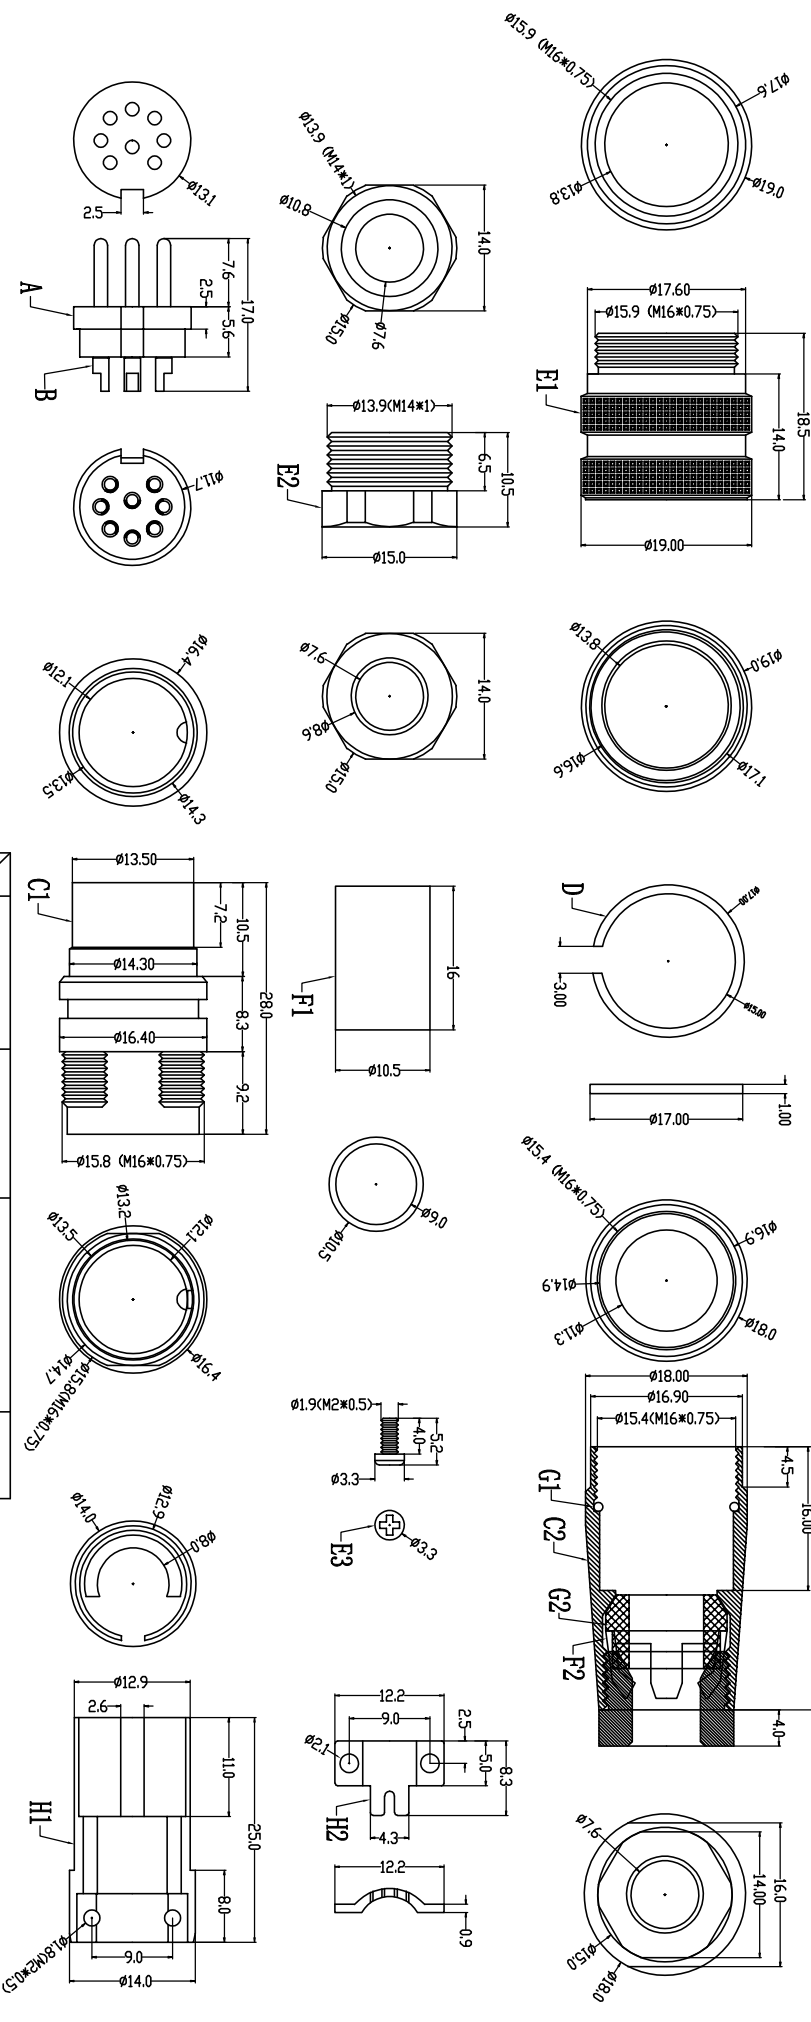


PIN数	3pin	4pin	5pin	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

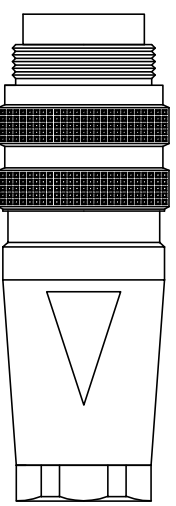

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PBT+GF	BLACK	1
B CONTACT	BRASS	GOLD PLATED	3~24
C OUTER CONTACT	ALALLOY/BRASS	NICKL PLATED	1+1
D SNAP RING	SS	NATURAL COLOR	1
E NUT	BRASS/SPE-SD	NICKL PLATED	1+1+2
F PROTECTIVE SHEATH	PVC/PP	NATURAL COLOR	1+1
G O-RING	EPDM	RED/BLACK	1+1
H HOUSING	ALALLOY/SPE-SD	NICKL PLATED	1+1

TITLE: M16系列 24针线端公头 (五金组装式)
 PART NO.: C1-M16AXB-M02
 SHEET: 1 / 1
 SCALE: 1 : 1
 UNIT: mm
 SIZE: A4
 REV: A/0
 DRAWN: Xie Wenjun
 CHECK: Long Jichang
 DATE: 2023-05-05

Engagement force	≤60N	Rated voltage	3.8kV@220V 1.2kV@190V/60V 2kV@150V/60V
Disengagement force	≥15N	Rated current	3.8A@1.5A 1.2A@1.9A/3A 2kA@1.1A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

Dongguan Changjun Electronics Co., LTD
 东莞市昌骏电子有限公司