PIN数	3pin	4pin	5pin	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin
图纸											
接触直径	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm

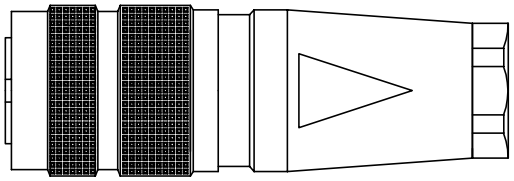

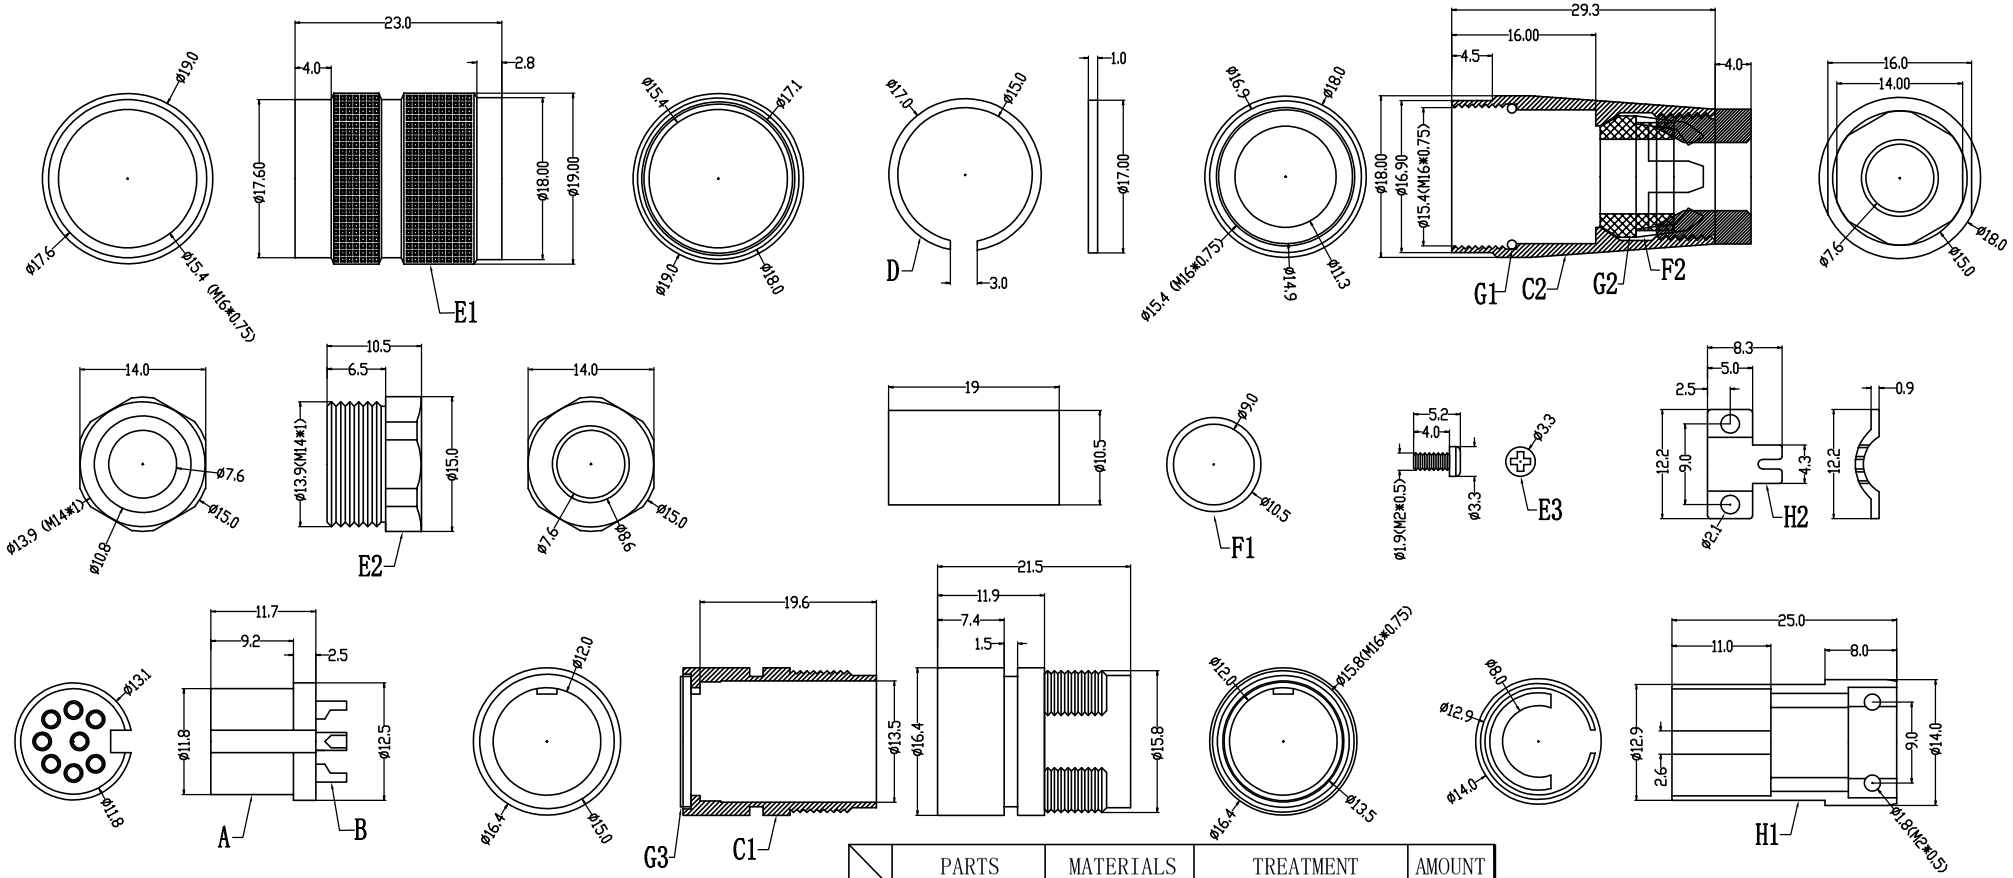

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PBT+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	3~24
C	OUTER CONTACT	BRASS	NICKL PLATED	1+1
D	SNAP RING	SS	NATURAL COLOR	1
E	NUT	BRASS/SPCE-SD	NICKL PLATED	1+1+2
F	PROTECTIVE SHEATH	PVC/PP	NATURAL COLOR	1+1
G	O-RING	EPDM	RED/BLACK	1+1+1
H	HOUSING	ALALLOY/SPCE-SD	NICKL PLATED	1+1

Engagement force	≤60N	Rated volage	3~8pin:250V 12~19pin:60V 24pin:60V
Disengagement force	≥15N	Rated current	3~8pin:5A 12~19pin:3A 24pin:1A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP65/IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-25° C~105° C

Dongguan Changjun ElectronicsCo.,LTD

东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M16防水3~24P线端母头（五金组装式）

PART NO:	DRAWING NO.:			
CJ-M16AXB-F02	CP-M16A006			
SHEET: 1 / 1	SCALE: 1 : 1	UNIT: mm	SIZE: A4	REV A/0
DRAWN: Xie Wenjun	CHECK: Long Jichang	DATE: 2023-05-05		