| PIN数 | 2pin | 3pin | 4pin | 5pin（180°） | 5pin（240°） | 6pin | 7pin | 8pin | 12pin | 14pin | 16pin | 19pin | 24pin |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 图纸 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 接触直径 | 1.50mm | 1.50mm | 1.50mm | 1.50mm | 1.50mm | 1.50mm | 1.50mm | 1.50mm | 1.00mm | 1.00mm | 1.00mm | 1.00mm | 0.50mm |

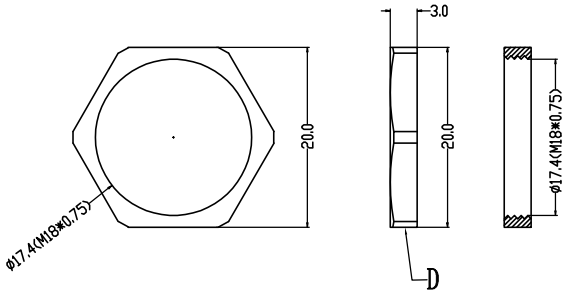


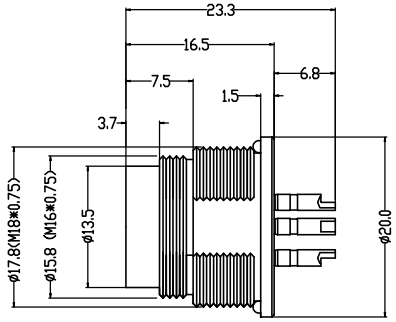


Recommended Panel Cut-out













| | | | |
|---|---|---|---|
| Engagement force | ≤60N | Rated volage | 2~8pin:250V<br>12~19pin:60V<br>24pin:60V |
| Disengagement force | ≥15N | Rated current | 2~8pin:5A<br>12~19pin:3A<br>24pin:1A |
| Mechanical lifespan | ≥500 | Insulation resistance | ≥1000M Ω |
| IP rating | IP65/IP67 | Contact resistance | ≤10m Ω |
| Flammability | UL94 V-0 | Operation Temperature | -25° C~105° C |

| | PARTS | MATERIALS | TREATMENT | AMOUNT |
|---|---|---|---|---|
| A | HOUSING | PBT+GF | BLACK | 1 |
| B | CONTACT | BRASS | GOLD PLATED | 2~24 |
| C | OUTER CONTACT | BRASS | NICKL PLATED | 1 |
| D | NUT | BRASS | NATURAL COLOR | 1 |
| E | O-RING | EPDM | RED/BLACK | 1 |
| F | | | | |

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ± 1°

TITLE: M16防水2~24P线端公头 前锁面板式M18 F20T

| PART NO: | DRAWING NO.: | | | |
|---|---|---|---|---|
| CJ-M16AXX(2~24)-M01Q-M18F20T | CP-M16A022 | | | |
| SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV A/0 |
| DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2024-09-16 | | |