由 Autodesk 教育版产品制作

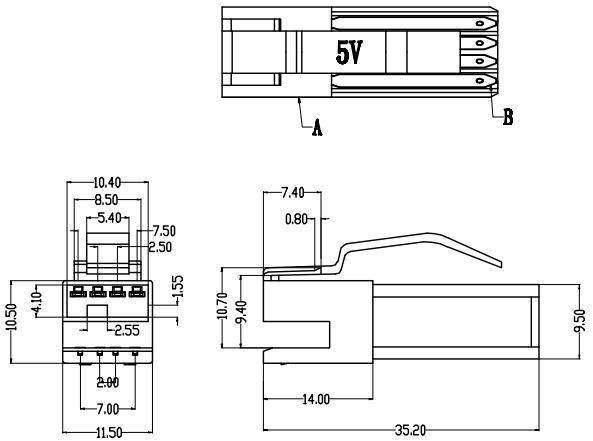

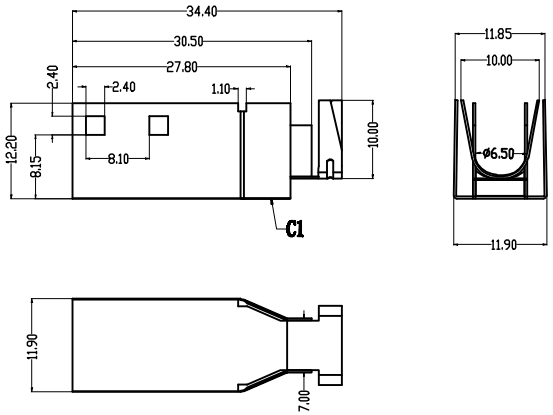

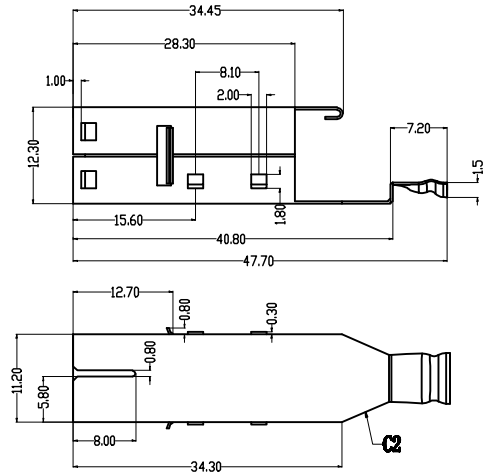

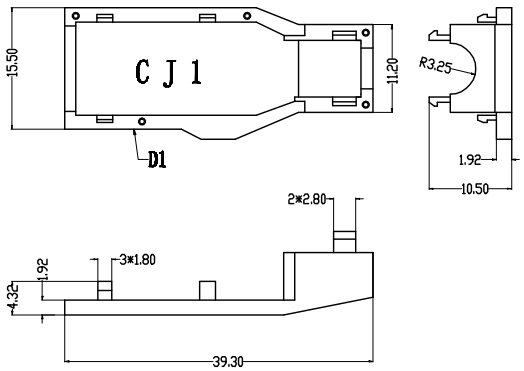

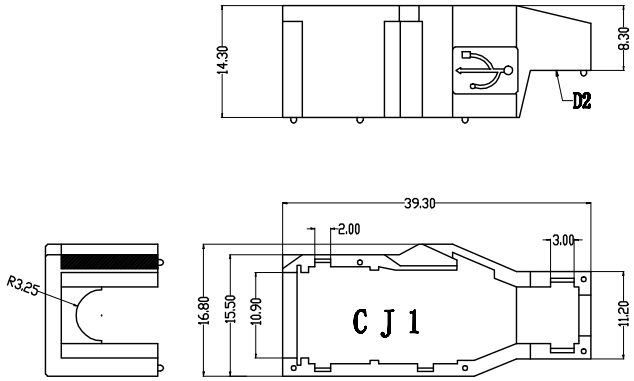

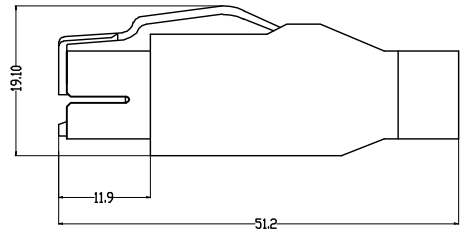

					PARTS	MATERIALS	TREATMENT	AMOUNT
				A	HOUSING	PA66+GF	YELLOW	1
Engagement force	≤30N	Rated volage	250V	B	CONTACT	BRASS	GOLD PLATED	8
Disengagement force	≥50N	Rated current	1.5A	C	OUTER CONTACT	BRASS	NICKL PLATED	1+1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	D	SHELL	ABS	SPECIFY COLOR	1+1
IP rating		Contact resistance	≤10mΩ	E				
Flammability	UL94 V-0	Operation Temperature	-25° C~85° C	F				

Dongguan Changjun ElectronicsCo.,LTD
东莞市昌骏电子有限公司

TOLERANCE
.xxx ±0.05
.xx ±0.10
.x ±0.30
x ±0.50
ANGLE ±1°

TITLE: 8P双层POWER USB公头 5V(ø6.5)

PART NO: CJ-USB8-5V-MD1-6.5

DRAWING NO.: CP-USB0006

SHEET: 1 / 1 | SCALE: 1 : 1 | UNIT: mm | SIZE: A4 | REV: A/0

DRAWN: Xie Wenjun | CHECK: Long Jichang | DATE: 2022-01-05

由 Autodesk 教育版产品制作